

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Reinforced Insulation Per EN 41003/EN 60950

Turns Ratio ($\pm 5\%$)	1:1.36CT
---------------------------	----------

Parameter	Min.	Max.	Units
Open Circuit Inductance Oscillation Voltage = 20mV Oscillation Frequency = 100.0 KHz	1.2		mH
Leakage Inductance Oscillation Level = 20mV Oscillation Frequency = 100.0 KHz		0.6	μ H
Interwinding Capacitance (C_{www}) Oscillation Frequency = 100.0 KHz		35	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.9	ohms
Isolation (HI-POT)	3000		V_{RMS}


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 31 pieces per tube


Surface mount version of this part available. Part# T-13635G

Primary Pins 10 - 6

Physical Dimensions
inches (mm)

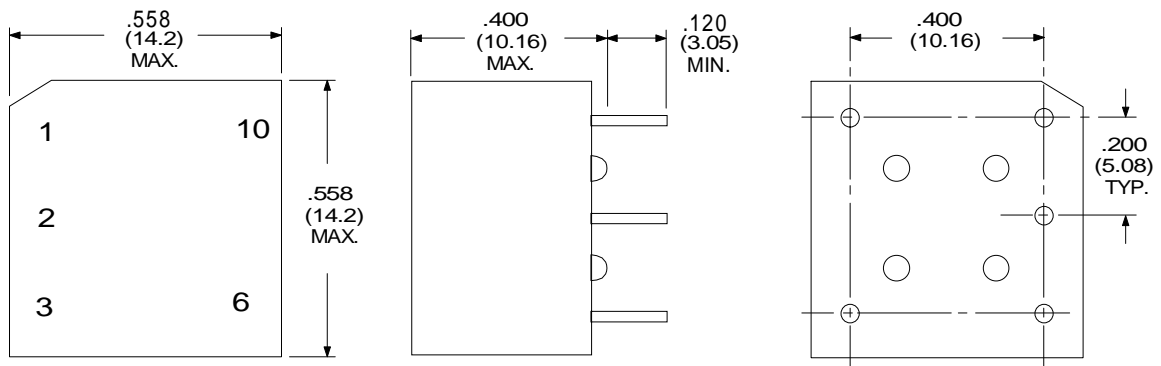

Schematic Diagram



RHOMBUS P/N: T-13635	
CUST P/N:	NAME:
DATE: 04/25/96	SHEET: 1 OF 1